

3" Round Plastic Lock Stress Plate **Dekflat PLT-P-R-3**



Application


Insulation and cover board attachment to steel and wood roof

Features and Benefits

- Flat bottom ideal for use on rigid board surfaces as well as standard insulation boards
- Polypropylene Impact Copolymer for ultimate strength

Product Selection

Material No.	Item	Description	Carton Wt. (lbs.)	Carton Qty.
792622	3" Round Plastic Lock Plate	PLT-P-R-3-B	22	1,000

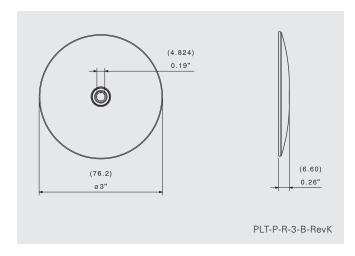

Specifications

OD: 3" Round Thickness: 0.26" (6.60 mm) Material: Polypropylene Color:

Approvals





State of Florida: FL20311

Installation and Application Considerations

Use in applications approved by the roofing system manufacturer. Use with:

- #12 Dekfast
- #14 Dekfast
- #15 Dekfast