


# Woodgrip™ Lap Bond Seal Panel to Panel Fastener

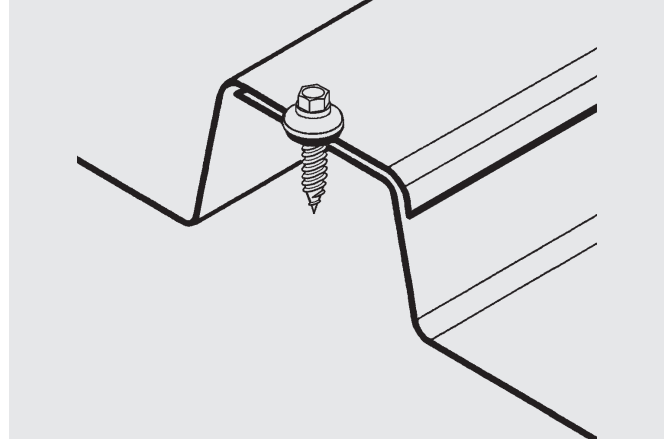

## Features and Benefits

- High hex washer head provides driving stability
- Sharp point for fast installation
- Assembled bond seal washer
- VistaCoat® premium coating system
- VistaCoat® limited warranty

## Application

Panel to panel side lap, end lap, and other stitch applications

## Product Selection


Material No.	Fastener Length		Thread Length*	Description	Carton Wt. (lbs.)	Carton Qty.
	(in)	(mm)				
1302423	3/4"	19	Full	WGL-#12x3/4-GB1/2	30	3,000

Plain product bagged 250 pieces, unless otherwise noted.

\*Note – Thread length measured from tip of the drill point to end of the threads.



# Woodgrip™ Lap Bond Seal Panel to Panel Fastener

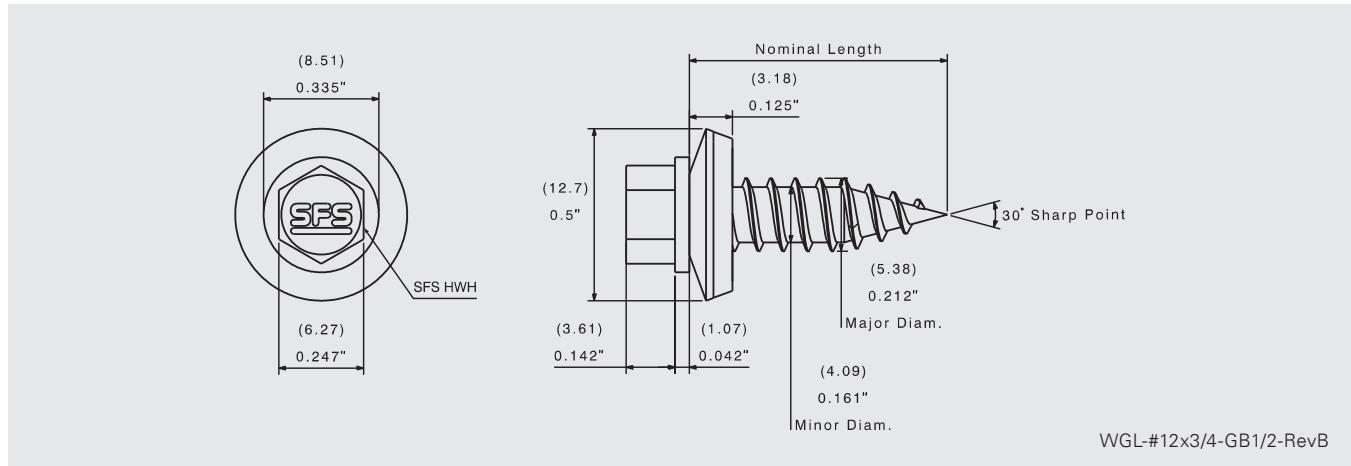

## Product Specifications

Diameter: #12 (5.38 mm)  
Threads Per Inch: 14  
Head Style: 1/4" dia. HWH AF (6.27 mm)  
Washer: 1/2" Galvanized and EPDM bond seal (12.7 mm)

Drill Point: Sharp point  
Drill Capacity: 2x24 ga.  
Thread Major Dia: 0.212" (5.38 mm)  
Thread Minor Dia: 0.161" (4.09 mm)

## Performance Data<sup>1,2</sup>

### Material Strength

Tensile	2100 lbf / 9341 N
Shear	1800 lbf / 8007 N
Torsional	88 lbf·in / 9.94 N·m

### Pull Over Strength Steel

<b>29 Ga (0.3 mm)</b>	577 lbf / 2567 N
<b>26 Ga (0.5 mm)</b>	637 lbf / 2834 N
<b>24 Ga (0.6 mm)</b>	800 lbf / 3559 N

<sup>1</sup> Pull over strength values are based on metal panel ksi values: 29 ga. (100 ksi), 26 ga. (70 ksi), 24 ga. (70 ksi).

<sup>2</sup> SFS [S-120]

## Installation and Application Considerations

Tools: 0–2500 rpm screw gun equipped with depth sensing nose piece.

**Use of impact guns or hammer drills is not recommended.**