


Woodgrip™ Lap Control Seal Panel to Panel Fastener

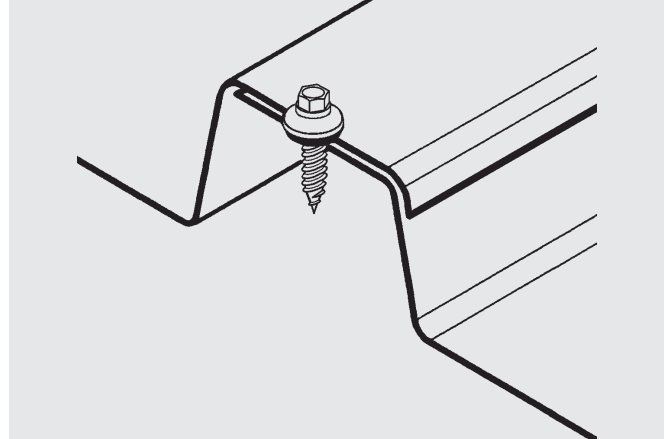

Features and Benefits

- High hex washer head provides driving stability
- Sharp point for fast installation
- Assembled control seal washer
- VistaCoat® premium coating system
- VistaCoat® limited warranty

Application

Panel to panel side lap, end lap, and other stitch applications


Product Selection

Material No.	Fastener Length		Thread Length*	Description	Carton Wt. (lbs.)	Carton Qty.
	(in)	(mm)				
1302309	3/4"	19	Full	WGL-#12x3/4-CS1/2	27	3,000

Plain product bagged 250 pieces, unless otherwise noted.

*Note – Thread length measured from tip of the drill point to end of the threads.

Woodgrip™ Lap Control Seal Panel to Panel Fastener

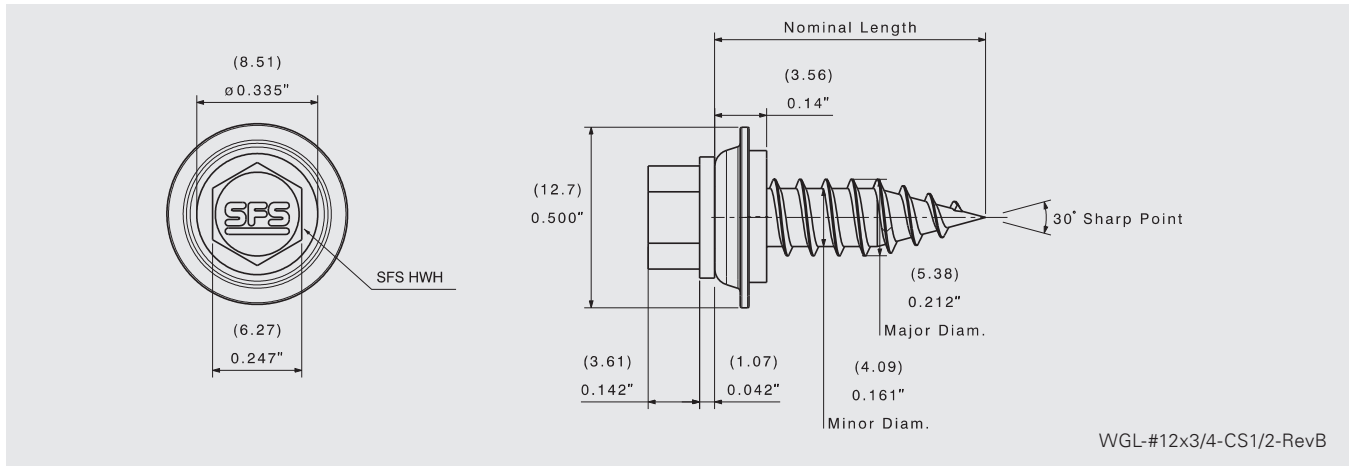

Product Specifications

Diameter: #12 (5.38 mm)
 Threads Per Inch: 14
 Head Style: 1/4" dia. HWH AF (6.27 mm)
 Washer: 1/2" Galvanized and EPDM control seal
 (12.7 mm)

Drill Point:	Sharp point
Drill Capacity:	2x24 ga.
Thread Major Dia:	0.212" (5.38 mm)
Thread Minor Dia:	0.161" (4.09 mm)

Performance Data^{1,2}

Material Strength		Pull Over Strength	
Tensile	2100 lbf / 9341 N	29 Ga (0.3 mm)	577 lbf / 2567 N
Shear	1800 lbf / 8007 N	26 Ga (0.5 mm)	637 lbf / 2834 N
Torsional	88 lbf·in / 9.94 N·m	24 Ga (0.6 mm)	800 lbf / 3559 N

¹ Pull over strength values are based on metal panel ksi values: 29 ga. (100 ksi), 26 ga. (70 ksi), 24 ga. (70 ksi).

² SFS [S-120]

Installation and Application Considerations

Tools: 0–2500 rpm screw gun equipped with depth sensing nose piece.

Use of impact guns or hammer drills is not recommended.

Metric values are approximate conversions.

All information is non-binding and without guarantee. Before using the products, all specifications and calculations must be checked by a suitably qualified person and local regulations must be observed. This document is subject to revision. We reserve the right to make technical changes. (07/2021, V1.01)