

1-3/4" Snap Lock **Engineered Panel Clip**



Application


Standing seam panel clips used for attachment of snap lock type panels wherein mechanical seaming is not required

Features and Benefits

- Manufactured from high quality, corrosion resistant steel meeting strict mechanical property requirements
- Tightly controlled manufacturing tolerances for a secure and functional fit every time
- · Allows unlimited thermal movement. Always follow the standing seam panel manufacturer's details and instructions on proper use, location and performance values as well as properly fixing their respective roof panels to the structure to prevent uncontrolled sliding

Product Selection

Material No.	Item	Description	Carton Wt. (lbs.)	Carton Qty.
728731	1-3/4" Snap lock clip	18 ga. (1.2 mm) G-90 Galvanized	58	500
728733	1-3/4" Snap lock clip	18 ga. (1.2 mm) 304SS	58	500

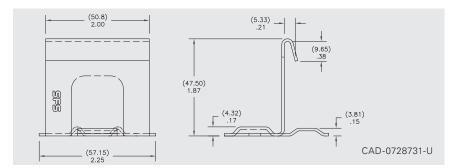

Specifications

Height: Width: Holes:

1.87" (47.50 mm) 2.00" (50.80 mm) 1-hole

Installation and Application Considerations

- Compatible with:
 - New Tech SS675
 - Roll Former Corp. SLP175
 - Englert S2000
 - Zimmerman SL1750
 - Quadro 1-3/4" Snap Lock
 - Ultra Seam US-175LS
 - Knudson 1-3/4" Snap Lock

- Refer to SFS standing seam fastener offering for panel clip attachment options
- Always consult with panel manufacturer or design engineer to ensure proper clip recommendations

Metric values are approximate conversions. All information is non-binding and without guarantee. Before using the products, all specifications and calculations T 866 847 5400 must be checked by a suitably qualified person and local regulations must be observed. This document is subject to revision. We reserve the right to make technical changes. (01/2022, V1.01)

US T 800 234 4533 us.sfs.com

Canada ca.sfs.com